




## CE-955-CAM-WD

Color Indoor Wide Dynamic Dome Camera

- PIXIM 1/3" C-MOS
- 540 TVL Resolution
- Minimum Illumination: 0.1 Lux (Slow Shutter Mode)
- 2.8 ~ 10.5mm Tamron Lens
- 120dB Maximum Wide Dynamic Range
- Application Presets
- Digital Pixel System® (DPS)
- DC12V / AC24V

### Dimensions

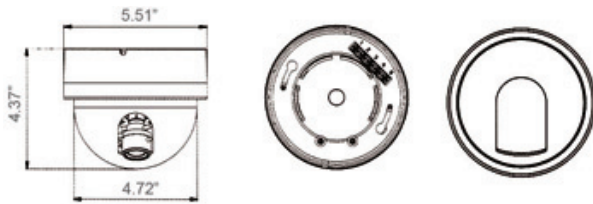

### Specifications

Camera	CE-955-CAM-WD
<b>Image Sensor</b>	1/3 Inch PIXIM C-MOS
<b>Resolution</b>	540 TV Lines (High Resolution Mode)
<b>Effective Pixels</b>	720 (H) x 540 (V)
<b>Scanning System</b>	525 Lines, Interlace
<b>S/N Ratio</b>	More than 48dB (AGC Off)
<b>Sync System</b>	Internal (DC12V) / Line Lock (AC24V)
<b>Scanning Frequency</b>	15.734 KHz (H), 59.94 Hz (V)
<b>Minimum Illumination</b>	0.1 Lux (Slow Shutter Mode)
<b>Shutter Speed</b>	1/60 ~ 1/100,000 sec.
<b>Dynamic Range</b>	120dB (Max.), 101dB (Typical)
<b>Lens</b>	2.8 ~ 10.5mm Vari-Focal / F1.2
<b>Video Output</b>	1.0 ~ 1.2Vp-p, 75Ω
<b>Power Consumption</b>	Max. 160mA (AC24V), Max. 320mA (DC12V)
<b>Power Requirement</b>	DC12V / AC24V
<b>Operating Temperature</b>	32°F ~ 113°F
<b>Operating Humidity</b>	Within 90% RH
<b>Dimensions</b>	5.51" (Dia.) x 4.37" (H)
<b>Weight</b>	1.26 lbs.
<b>OSD Menu</b>	<b>Control with OSD Button Pad</b>
<b>Presets</b>	Normal / Indoor / Outdoor / Custom
<b>Lens</b>	DC (Set BIAS and Limit)
<b>White Balance Control</b>	ATW / AWC Des / Manual
<b>Gain Control</b>	Off / Low / Middle / High
<b>Special</b>	Camera ID, Mirror, Backlight (BL Zone1), Resolution, Advanced (video Standard, Sync, Sharpness, Aperture), Save / Restore

Information in this document is subject to change

#### This Camera Features:



#### Recommended Power Supply

All Clinton Electronics Power Supplies

