





Lens not included

CE-CC118WD

Color Wide Dynamic Box Camera

- PIXIM 1/3" C-MOS
- 540 TVL Resolution
- Digital Pixel System® (DPS)
- 120dB Maximum Wide Dynamic Range
- Application Presets (Normal, Indoor, Outdoor, Custom)
- OSD Menu Control via Built-in Button Pad
- DC12V / AC24V

Dimensions

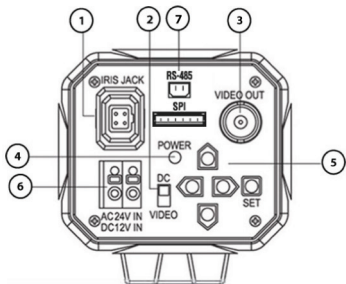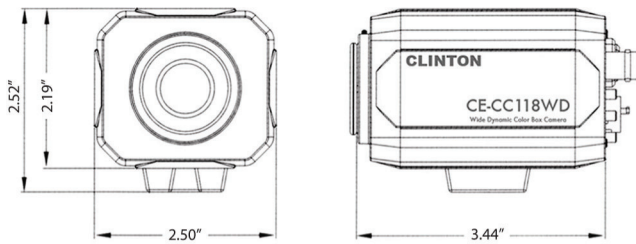

- 1. Auto iris lens connection**
- 2. Auto iris lens selection switch** : DC or VIDEO.
- 3. Video output**
- 4. Power LED**
- 5. Setting button**
 - **SET button** : Activates OSD menu and confirms settings.
 - **UP & DOWN buttons** : Moves the cursor up or down on the menu screen.
 - **LEFT & RIGHT buttons** : Change item values by moving the cursor to the left or right on the menu screen.
- 6. Power input terminal** : AC24V IN or DC12V IN
- 7. RS-485** : Optional RS-485 OSD Control

Recommended Lenses

YV2.8x2.8LA-SA2L	2.8~8mm, F0.95, Auto Iris
YV10x5B-SA2L	5.0~50mm, F1.3, Auto Iris
YV3.3x15R4A-SA2L	15.0~50mm, F1.5, Auto Iris, D/N
YV2.7x2.9LA-2	2.9~8mm, F0.95, Manual Iris

Recommended Power Supply

All Clinton Electronics Power Supplies

Optional Accessories

CE-H13	Outdoor Camera Housing
CE-D10WBZ	10" Indoor Dome Housing
CE-B15	Camera Mounting Bracket
CE-203x	Camera Mounting Bracket
CE-B07	Camera Mounting Bracket

Specifications

Camera	CE-CC118WD
Image Sensor	1/3 Inch PIXIM C-MOS
Resolution	540 TV Lines (High Resolution Mode)
Effective Pixels	720 (H) x 540 (V)
Scanning System	525 Lines, Interlace
S/N Ratio	48dB
Sync System	Internal / Line Lock
Scanning Frequency	15.734 KHz (H), 59.94 Hz (V)
Minimum Illumination	0.1 Lux (Slow Shutter Mode)
Shutter Speed	1/60 ~ 1/100,000 sec.
Dynamic Range	120dB (Max.), 95dB (Typical)
Iris Control	DC / Video
Lens Mount	C / CS Mount (Screw Lock)
Video Output	1.0 ~ 1.2 Vp-p, 75Ω
Power Consumption	Max. 80mA (AC24V), Max. 170mA (DC12V)
Power Requirement	DC12V / AC24V
Operating Temperature	32°F ~ 113°F
Operating Humidity	Within 90% RH
Dimensions	2.50" (W) x 2.52" (H) x 3.44" (D)
Weight	0.77 lbs.
OSD Menu	Control with OSD Button Pad
Presets	Normal / Indoor / Outdoor / Custom
Lens	Manual / DC (Set BIAS and Limit)
White Balance Control	ATW / ATW Des / Manual
Gain Control	Off / Low / Middle / High
Special	Camera ID, Mirror, Backlight (BL Zone1), Resolution, Advanced (Video Standard, Sync, Sharpness, Aperture), Save/Restore

Information in this document is subject to change

