


CE-D805 Installation Guide

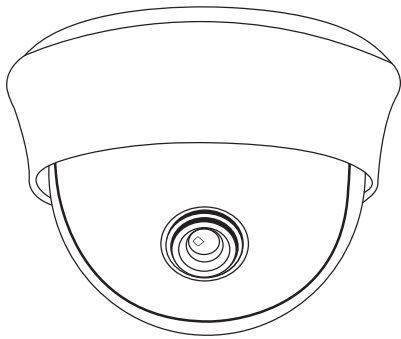

Included Items:

- CE-D805 Camera x 1
- Case Tool x 1
- Mounting Screws x 3
- Instructions x 1



Required Items:

- Phillips Head Screwdriver x 1

Installing the CE-D805


1. Opening the Camera

Locate the arrow on the lower half of case and insert the case tool as shown below to release the dome cover.

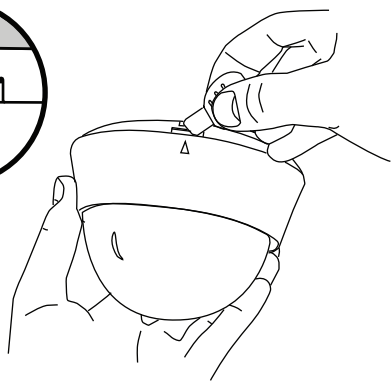


2. Remove the Dome Cover

Gently pull down on the dome cover to remove as shown.

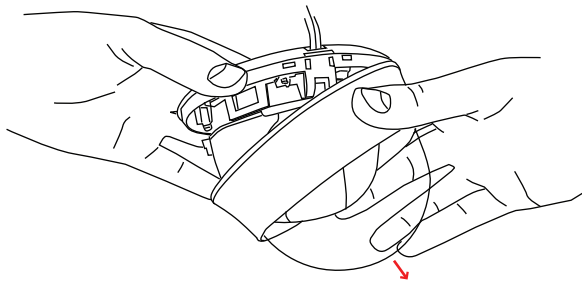


3. Locate the Mounting Plate Release Lever

On the inner rim of the dome base locate the text "UNLOCK & LOCK." Here you will find the mounting plate release lever.

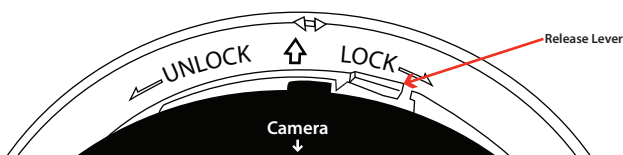


4. Release the Mounting Plate

Pull back on the lever to release the mounting plate as shown below.

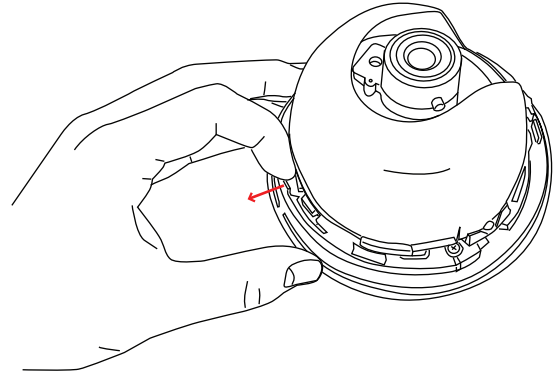


5. Remove the Mounting Plate from Camera

Flip the camera over and remove the mounting plate by rotating counter clockwise. Make sure that you are grabbing onto the black mounting plate only and not the white dome camera base. Hold the mounting plate release lever open during this process.

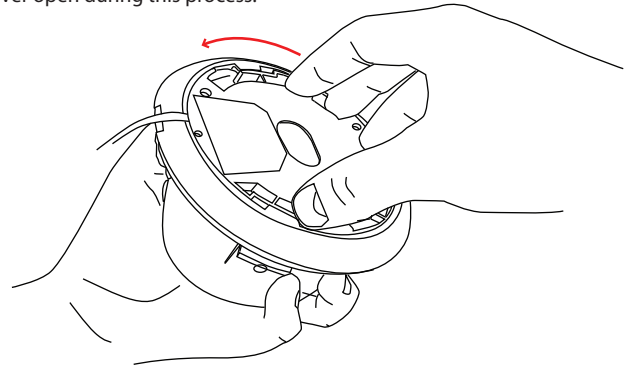

6. Install the Mounting Plate

Install the mounting plate to the desired installation surface using the 3 supplied mounting screws.

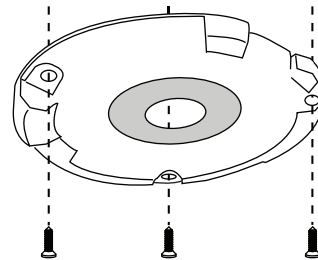

7. Connect the Power and Video Cables

8. Install the Camera onto the Mounting Plate

Install the camera onto the mounting plate by matching up the mounting plate to the camera base. Once the base is flush turn the dome camera slightly clockwise to lock the camera to the mounting plate.

9. Adjust the Camera

Remove the inner camera mask to make camera angle and lens adjustments. When finished replace the camera mask.

10. Replace the Dome Cover

Replace the dome cover by matching the arrow located on the case with same area where the case tool was used to open the case. Apply upwards pressure until the dome cover snaps into place.

CLINTON Electronics

CLINTON Electronics
6701 Clinton Road
Loves Park, IL 61111

1.800.447.3306 Sales
1.800.549.6396 Support
1.800.633.8712 Fax

www.clintonelectronics.com