

CE-M32-HD-B 32" HD/EX-SDI Public View Monitor w/ Zoom Lens



CE-M32-HD-B
(Black)
<<<


INFO:

- 1920 x 1080 Resolution
- 16:9 Aspect Ratio
- 350 nit Brightness
- 3000:1 Contrast Ratio
- 1/3" Panasonic 2.48 Megapixel CMOS Image Sensor
- 3-10.5mm (f1.4) Motorized True D/N Auto Focus Zoom Lens
- 1 HDMI Input
- 1 BNC Composite Output
- 1 HD-SDI/EX-SDI Output
- SD Card Player for PIP Window (4GB SD Card Included)
- Sleek, rounded steel cabinet
- Low-Glare Tempered Glass Protective Front
- Flashing LEDs
- Text Overlay "RECORDING IN PROGRESS" or "WELCOME" in English or Spanish
- 12VDC Output Port for External Camera or Accessory Power
- VESA 100 & 100x200
- DC24V
- UL Listed

SPECIFICATIONS:

Monitor	
Display	32" LED Backlight LCD
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	350 nit
Contrast Ratio	3000:1
Viewing Angle	178° / 178°
Response Time	6.5ms
Mounting	VESA 100 & 100x200
In / Out Impedance	75Ω /Auto Terminating Output
Video Inputs / Outputs	1 HDMI Input 1 HD-SDI / EX-SDI Output 1 BNC Output
Power Consumption	58 Watts
Power Requirement	DC24V or 110VAC
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	29.25" x 19.625" x 3.1" 742.95mm x 498.475mm x 78.74mm
Weight	27.6 lbs / 12.519kg
HD-SDI/EX-SDI Camera	
Image Sensor	1/3" Panasonic 2.48 Megapixel CMOS Image Sensor
Resolution	Full HD 1080p @ 30fps
Effective Pixels	1920 (H) x 1080 (V)
Minimum Illumination	0.1 Lux Color / 0.01 LUX B&W
Shutter Speed	1/50 - 1/10,000 sec.
Lens	3-10.5mm (f1.4) Motorized True D/N Auto Focus Zoom Lens
OSD Control	Exposure, Day/Night Control, Digital Wide Dynamic Range, Back Light Compensation, Fog Reduction, White Balance, Noise Reduction, Sense Up, Sharpness, Contrast, Saturation, Image Mirror, Privacy Mask, Motion Detection
Recommended Power Supply	
CE-PS200	120W Single Monitor Power Supply (24VDC)
CE-S320-B	320W Multiple Monitor Power Supply (24VDC)
CE-600-24-B	600W Multiple Monitor Power Supply (24VDC)

DIMENSIONS:

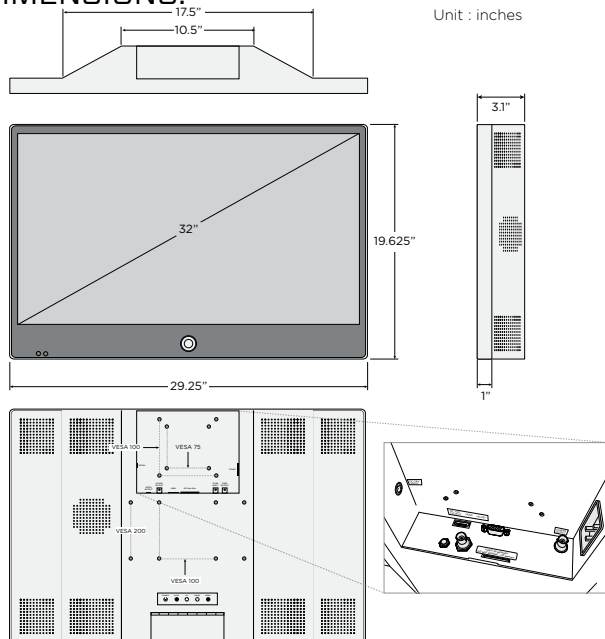

CERTIFICATIONS:

