

CE-VT320-NB 32" HD-SDI CCTV LCD Monitor (No Base)




FEATURES:

- 32" LCD Panel
- 1920 x 1080 Resolution / 16:9 Aspect Ratio
- 350 nit Brightness / 3000:1 Contrast Ratio
- 1 HDMI Input
- 1 EX-SDI 2.0 Input / 1 EX-SDI 2.0 Output
- 1 CVBS Input / 1 CVBS Output
- 1 VGA Input
- 12VDC (1A) Output for powering external camera or other device
- Steel Bezel
- Flashing LED (on/off selectable)
- Selectable Security Banner Overlay (optional)
- VESA 100, 100 x 200 & 200
- Dual Voltage: 110-240 VAC or DC24V
- Remote Included
- UL Listed

NOTE: Base Not Included

DIMENSIONS

UNIT : Inches

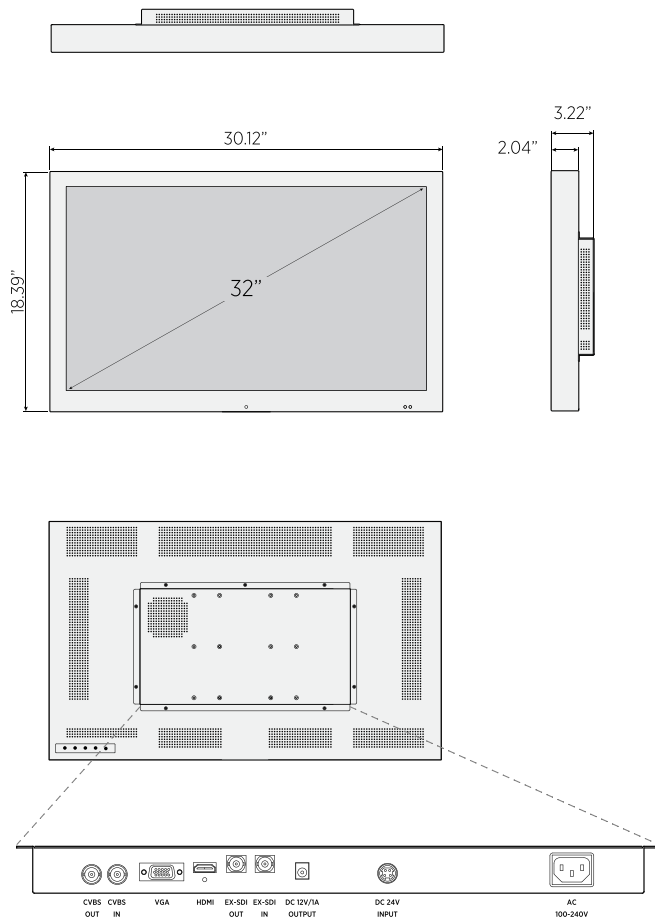

SPECIFICATIONS:

Display	32" LED Backlight LCD Panel
Resolution	1920 x 1080
Control	OSD (On Screen Display) Control
Aspect Ratio	16:9
Display Colors	16.7M
Brightness	350 nit
Contrast Ratio	3000:1
Viewing Angle (H x V)	178° x 178°
Response Time	6.5ms
In / Out Impedance	75Ω /Auto Terminating Output
Video Inputs	1 EX-SDI 2.0 / HD-SDI (BNC) 1 CVBS Input (BNC) 1 VGA Input 1 HDMI Input
Video Outputs (Loop-through)	1 EX-SDI 2.0 / HD-SDI (BNC) 1 CVBS Input (BNC)
Support Resolution	640 x 480 - 1920 x 1080
Audio Inputs / Outputs	n/a
Power Output	n/a
Power Consumption	38.72 Watts (DC24V)
Power Requirement	100 - 240 VAC or 24VDC
Mounting	VESA 100 & 100 x 200
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	30.12" x 18.39" x 3.22" 765.048mm x 467.106mm x 81.788mm
Weight	22.4 lbs / 10.16 kgs

Recommended DC24V Power Supply

CE-PS200	120W (5.0A) DC24V Single Monitor Power Supply
CE-S320-B	320W (12.5A) DC24V Multiple Monitor Power Supply
CE-600-24-B	600W (25A) DC24V Multiple Monitor Power Supply

CERTIFICATIONS:

