

CE-M32S

32" Analog Public View Monitor (White)

Image for Color Reference Only
Actual Product May Vary




Ceiling Mount Pole Shown Not Included

KEY FEATURES:

- Built-in 1000 TVL analog camera with 2.8-12 mm (f1.2) varifocal lens
- Motion detection triggers flashing LED light and/or on-screen banner message, such as "Recording in Progress" or "Monitoring in Progress"
- 1920 x 1080 Full HD panel resolution with 16:9 aspect ratio
- 350-nit brightness with 3,000:1 contrast ratio
- Durable steel cabinet with acrylic front panel
- VESA mounting: 100 x 100 mm and 100 x 200 mm
- Dual-voltage operation: 110-240 VAC or 24 VDC; power supply sold separately
- TÜV SÜD Compliant, NDAA & TAA Compliant

DIMENSIONS:

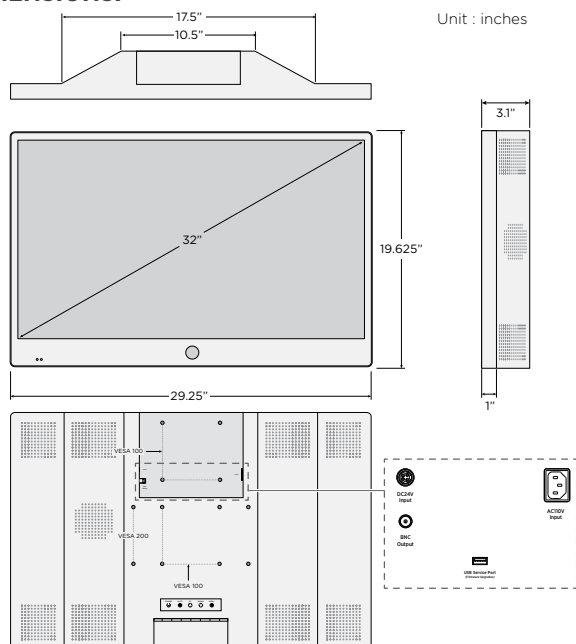

MONITOR

Display	32" LED Backlight LCD
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	350 nit
Contrast Ratio	3000:1
Viewing Angle (H x V)	178° x 178°
Response Time	6.5ms
Mounting	VESA 100 & 100 x 200
In / Out Impedance	75Ω /Auto Terminating Output
Video Output	1 BNC Output
Power Consumption	58 Watts
Power Requirement	DC24V or 90-260VAC
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	29.25" x 19.63" x 3" 742.95mm x 498.602mm x 76.2mm
Weight	33 lbs / 14.968kg

CAMERA

Image Sensor	1/3" SONY Exmor 1.3 Megapixel
Resolution	1000 TVL
Effective Pixels	1305 (H) x 1049 (V), 1.37 Mega Pixels
Scanning System	2:1 Interlace
S/N Ratio	52dB
Sync System	Internal
Minimum Illumination	0.00001 Lux (Sens-Up x32)
Shutter Speed	1/60 - 1/60,000 sec.
Lens	2.8 - 12mm (F1.2) Lens
Video Output	1.0 Vp-p, 75Ω
Frequency	Horizontal: 15.734 KHz, Vertical: 59.94 Hz

CAMERA OSD MENU - S8

Menu Control	OSD Menu Control via built-in joystick
Exposure	Shutter, Sens-Up, AGC
White Balance	ATW, AWB, AWC-SET, Manual
Image Adjust	Sharpness, Gamma, Brightness, Saturation, Black Level
Backlight	HLC, BLC, WDR
Day & Night	Auto, Color, B&W
DNR (3DNR)	Off, Low, Middle, High
Special	Rotate, ACE, Defog, Lens Shading, Privacy, Motion
Serial	Cam ID, Baudrate, ID Display
System	CVBS Filter, Language, Cam Title, Reset

RECOMMENDED POWER SUPPLY

CE-PS200	120W Single Monitor Power Supply (24VDC)
CE-S320-B	320W Multiple Monitor Power Supply (24VDC)
CE-600-24-B	600W Multiple Monitor Power Supply (24VDC)

CERTIFICATIONS:

