

CE-M19S


19" Analog Public View Monitor (White)



KEY FEATURES:

- Built-In 1000 TVL Analog Camera w/ 2.8-12mm (f1.2) Lens
- Motion detection triggers flashing LED and/or on-screen message (*Recording In Progress* or *Monitoring In Progress*)
- 1280 x 1024 Resolution / 4:3 Aspect Ratio
- 400 nit Brightness / 1,000:1 Contrast Ratio
- Steel Cabinet w/ Acrylic Front
- Flashing LED
- 1 BNC Output
- VESA 75 & 100
- DC24V (Power Supply Sold Separately)
- UL Listed
- NDAA & TAA Compliant

DIMENSIONS:

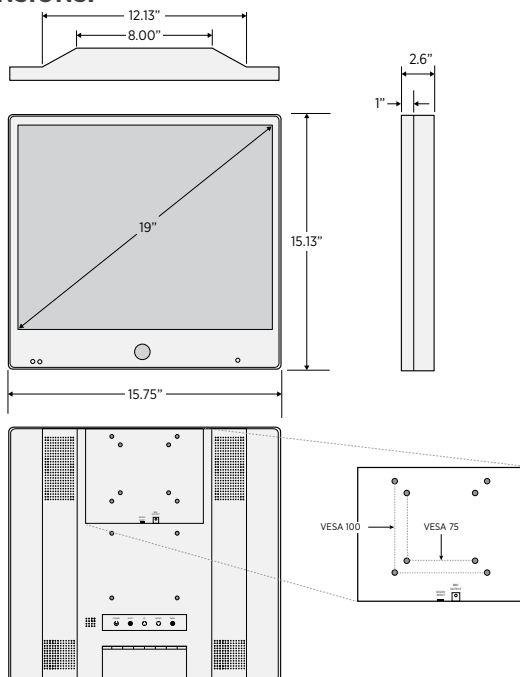

MONITOR	
Display	19" LED Backlight LCD
Resolution	1280 x 1024
Aspect Ratio	4:3
Display Colors	16.7M (8 BIT)
Brightness	400 nit
Contrast Ratio	1000:1
Viewing Angle (H x V)	178° x 178°
Response Time	5ms
Mounting	VESA 75 & 100 (M4)
In / Out Impedance	75Ω / Auto Terminating Output
Video Outputs	1 BNC Output
Power Consumption ±10%	15.6 Watts / 0.65 Amps
Power Requirement	DC24V
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	15.75" x 15.13" x 2.6" 400.05mm x 384.302mm x 66.04mm
Weight	13 lbs / 5.896kg

CAMERA	
Image Sensor	1/3" SONY Exmor 1.3 Megapixel
Resolution	1000 TVL
Effective Pixels	1305 (H) x 1049 (V), 1.37 Mega Pixels
Scanning System	2:1 Interlace
S/N Ratio	52dB
Sync System	Internal
Minimum Illumination	0.00001 Lux (Sens-Up x32)
Shutter Speed	1/60 - 1/60,000 sec.
Lens	2.8 - 12mm (F1.2) Lens
Video Output	1.0 Vp-p, 75Ω
Frequency	Horizontal: 15.734 KHz, Vertical: 59.94 Hz

CAMERA OSD MENU - S8	
Menu Control	OSD Menu Control via built-in jopystick
Exposure	Shutter, Sens-Up, AGC
White Balance	ATW, AWB, AWC-SET, Manual
Image Adjust	Sharpness, Gamma, Brightness, Saturation, Black Level
Backlight	HLC, BLC, WDR
Day & Night	Auto, Color, B&W
DNR (3DNR)	Off, Low, Middle, High
Special	Rotate, D-Zoom, ACE, Defog, Lens Shading, Privacy, Motion
Serial	Cam ID, Baudrate, ID Display
System	CVBS Filter, Language, Cam Title, Reset

RECOMMENDED POWER SUPPLY	
CE-PS91	3.75A / 90W Single Monitor Power Supply (24VDC)
CE-PS200	5A / 120W Single Monitor Power Supply (24VDC)
CE-S320-B	25A / 320W Multiple Monitor Power Supply (24VDC)
CE-S600-24-B	12.5A / 600W Multiple Monitor Power Supply (24VDC)

CERTIFICATIONS:

