

### CE-CC119

True D/N HD Analog Box Camera





\*Lens Sold Separately

#### KEY FEATURES:

- 1/2.8" SONY Starvis 2.13 Megapixel CMOS Sensor
- Selectable HD Analog Output: CVBS\* or A\_HD, C\_VI, T\_VI (Up to 2MP)
- True Day/Night
- CS Lens Mount, Lens Sold Separately
- S8 Digital Signal Processor
- Top or bottom 1/4"-20 mounting hole for bracket mounting
- OSD Menu Control via Built-In Joystick or CE-REMOTE
- DC12V/AC24V
- NDAA & TAA Compliant

#### DIMENSIONS:

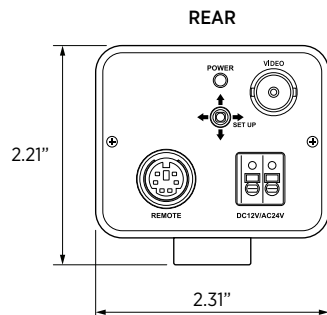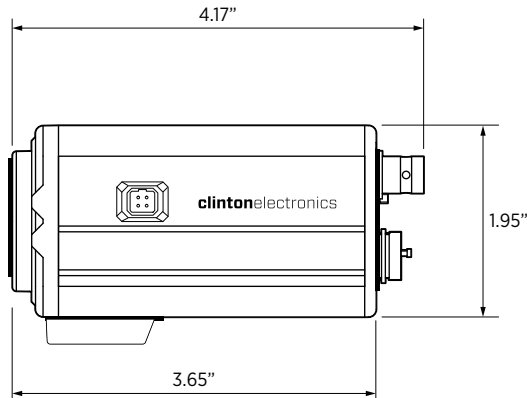

CAMERA	
Image Sensor	1/2.8" SONY Starvis 2.13 Megapixel CMOS Sensor
Resolution	CVBS* (Analog), 2MP - Full HD 1080p (HD Analog)
Effective Pixels	1945 (H) x 1097 (V), 2.13 M Pixels
Scanning System	Progressive Scan
S/N Ratio	More than 52dB (AGC Off)
Frame Rate	1080p_30 / 720p_30 (when HD Analog)
Minimum Illumination	1 Lux (COLOR) / 0.1 Lux (B&W)
Shutter Speed	1/30 - 1/30,000 sec. / AUTO
Lens	n/a - Sold Separately
Field of View	n/a - Varies by lens type
Lens Mount	CS Mount
Video Output	CVBS / A_HD / C_VI / T_VI (output selectable)
Power Consumption Max, +/- 10%	DC12V: 230mA AC24V: 92mA
Power Requirement	DC12V / AC24V
Operating Temperature	14° to 122° F (-10° to 50° C)
Operating Humidity	90% RH Max.
Weather Rating	n/a - Indoor Use Only
IR LEDs	n/a
Heaters/Fan	n/a
Materials	Aluminum Housing
Dimensions (no lens)	4.17" (L) x 2.31" (W) x 2.21" (H) 105.91mm (L) x 58.67mm (H) x 50.8mm (D)
Weight (no lens)	0.53 lbs / 0.24 kgs

OSD - S8	
Menu Control	OSD Menu Control via built-in joystick or CE-REMOTE
Exposure	Shutter, Sens-Up, AGC
White Balance	ATW, AWB, AWC-SET, Manual
Image Adjust	Sharpness, Gamma, Brightness, Saturation, Black Level
Backlight	HLC, BLC, WDR
Day & Night	Auto, Color, B&W
DNR (3DNR)	Off, Low, Middle, High
Special	Rotate, D-Zoom, ACE, Defog, Lens Shading, Privacy, Motion
Serial	Cam ID, Baudrate, ID Display
System	HD Analog (CVBS / A_HD / C_VI / T_VI), Frame Rate, Video System, CVBS Filter, Language, Cam Title, Reset

ACCESSORIES	
CE-2812DN-MPL	4MP 2.8-12mm f1.4 D/N Lens
CE-0622DN-MPL	4MP 6-22mm f1.6 D/N Lens
CE-0550DN-MPL	5MP 5-50mm f1.6 D/N Lens
CE-REMOTE	Plug in OSD remote
CE- B07-WHITE	Box Camera Bracket - White
CE- CPBA	Camera Pole Adapter Bracket - White

\*CVBS (Analog) is the default video output, selectable via OSD Menu or Joystick