clintonelectronics

CE-VT270-LC 27” CCTV LCD Monitor (No Base)




FEATURES:

- 1920 x 1080 Resolution
- 16:9 Aspect Ratio
- 300 nit Brightness
- 3000:1 Contrast Ratio
- 1 BNC Input / 1 BNC Output
- 1 VGA Input
- 1 HDMI Input
- Plastic Bezel
- Flashing LED (on/off selectable)
- VESA 100 & 100 x 200
- DC24V (Power Supply Sold Separately)
- Remote Included
- UL Listed

NOTE: Base Not Included

DIMENSIONS:

UNIT : inches

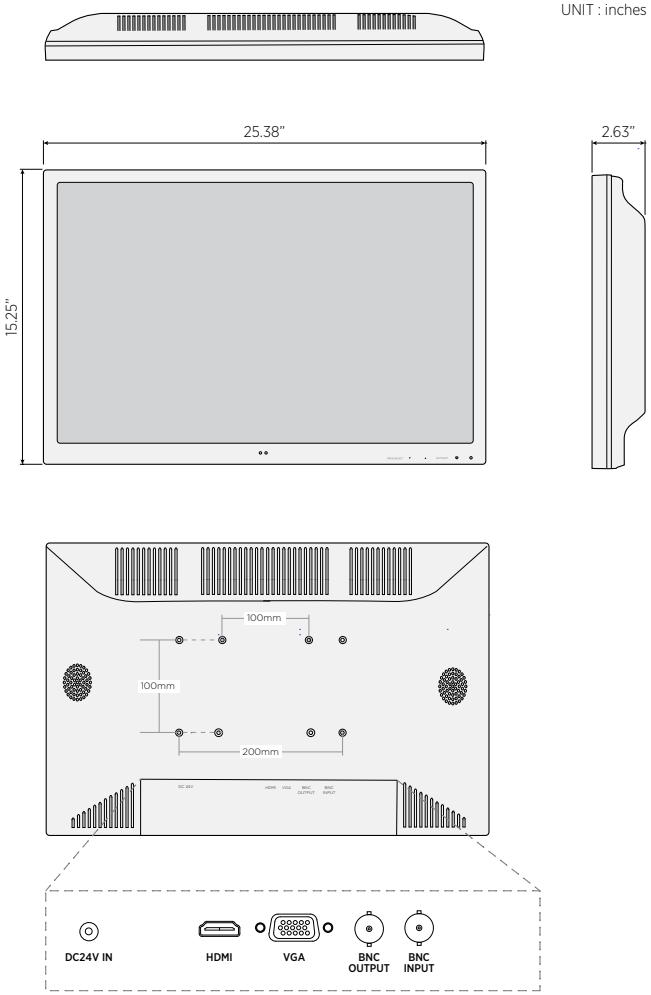

SPECIFICATIONS:

LCD Panel	27” TFT LCD
Panel Resolution	1920 x 1080
Control	OSD (On Screen Display) Control
Aspect Ratio	16:9
Display Colors	16.7M
Brightness	300 nit
Contrast Ratio	3000:1
Viewing Angle (H x V)	178° x 178°
Response Time	8ms
Refresh Rate	60 Hz
In / Out Impedance	75Ω /Auto Terminating Output
Mounting	VESA 100 & 100 x 200 (base not included)
Enclosure	Plastic Bezel
Video Inputs / Outputs	1 VGA Input 1 HDMI 1 BNC Input / 1 BNC Output
Audio Inputs / Outputs	n/a
Power Consumption	36 Watts (1.5 Amps)
Power Requirement	DC24V
Operating Temperature	14°F - 122°F / -10°C - 50°C
Dimensions (W x H x D)	25.38” x 15.25” x 2.63” 645mm x 387mm x 67mm
Weight	12.5 lbs / 5.6 kg

Recommended DC24V Power Supply	
CE-PS200	120W (5.0A) DC24V Single Monitor Power Supply
CE-S320-B	320W (12.5A) DC24V Multiple Monitor Power Supply
CE-600-24-B	600W (25A) DC24V Multiple Monitor Power Supply

CERTIFICATIONS:

Part 15B, Class B

Clinton reserves the right, without notification, to make changes in product design & specification.