

CE-VB2

UTP Video Baluns




Key Features:

- Transmit video over UTP cable
- Supports digital and analog CCTV video signals:

DIGITAL:	ANALOG:
· EX-SDI	· CVBS (Standard Analog)
· EX-SDI 2.0	· CVI
· EX-SDI 4MP	· TVI
	· AHD
- No power required
- 60dB cross talk & noise immunity
- Sold in pairs - Two baluns per package


VIDEO INPUT/OUTPUT	
1ch BNC	75 Ohms
(+ / -) Terminal block	100 Ohms
SDI	EX-SDI, EX-SDI 2.0, EX-SDI 4MP
Analog	CVBS, HD-Analog: (CVI, TVI, AHD)
Max Transmission Distance *combined coax & UTP	EX-SDI 1.0: 200ft EX-SDI 2.0: 300ft EX-SDI 4MP: 200ft CVBS: 600ft HD Analog (1080p): 500ft
GENERAL	
Power Requirement	—
Power Consumption	—
Frequency Response	DC to 60MHz
Attenuation	0.5dB
CMRR	60dB
Operating Temperature	14°F - 158°F / -10°C - 70°C
Operating Humidity	0-95% RH
Dimensions (L x W x H) *excluding connectors	1.53" x .62" x .74" / 39mm x 16mm x 19mm
Weight (pair)	0.10 lbs / 0.045 kg
Materials	ABS Plastic Housing

Dimensions:

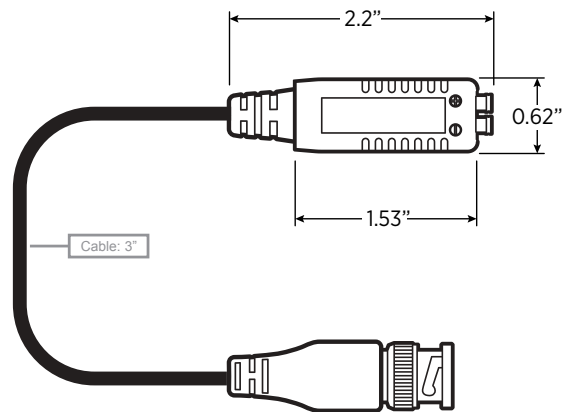

Unit : Inches

Connection Diagram (Example):

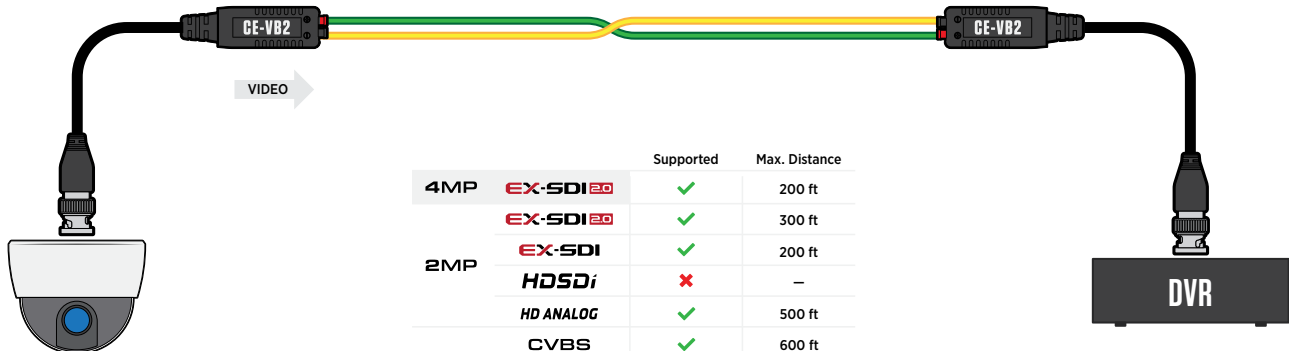

*Distances will vary depending on UTP wire type & integrity. Splices, couplers and severe kinks will reduce the overall possible distance.

**Separate camera power source required, transmits video only