

CE-M10PA-B


10" Portrait Mode PVM w/ AXIS IP Camera



KEY FEATURES:

- Built-In AXIS® M3065-V IP Camera w/ 3.1mm (f2.0) Fixed Lens, set to display Corridor Mode (portrait video)
- Built-In PIR Sensor or Alarm Input triggers optional flashing banner, LED or switches from static store logo to camera
- 16:10 Aspect Ratio / 800 x 1280 Resolution
- 350 nit Brightness / 800:1 Contrast Ratio
- Steel Cabinet with Black Acrylic Front
- "RECORDING IN PROGRESS" or "WELCOME" Text Overlay in English or Spanish & Flashing LED Light (optional)
- H.264, H.265 & Motion JPEG Compression
- 1 RJ45 Ethernet Port
- VESA 75 & 100
- DC24V or PoE+
- UL Listed

DIMENSIONS:

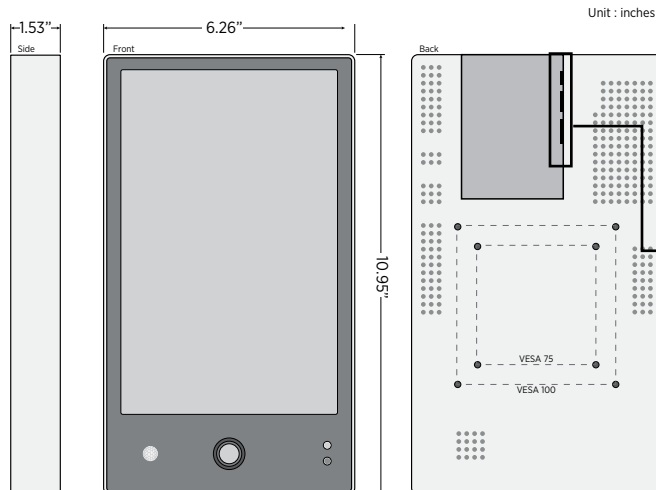

MONITOR	
Display	10" TFT LCD - Portrait Mode
Resolution	800 x 1280
Aspect Ratio	16:10
Display Colors	16M
Brightness	350 nit
Contrast Ratio	800:1
Viewing Angle (H x V)	170° x 170°
Response Time	25ms


CAMERA	
Image Sensor	1/2.9" Progressive Scan RGB CMOS
Lens	3.1mm (f2.0) Lens
Field of View	102° (Horizontal) / 55° (Vertical)
Minimum Illumination	0.2 Lux (Color) / 0.04 Lux (B&W)
Shutter Speed	1/32500 - 1/5 sec.

VIDEO	
Video Compression	H.264 (MPEG-4 Part 10/AVC) Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG
Resolution	1920x1080 (1080p) to 320x240
Frame Rate	25/30 fps with power line frequency 50/60 Hz
Video Streaming	Multiple, individually configurable streams in H.264, H.265 and Motion JPEG Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth

NETWORK	
Security	Password protection, IP address filtering, HTTPS encryption, IEEE 802.1X network access control, Digest authentication, User access log, centralized certificate management, brute force delay protection, signed firmware
Supported Protocols	IPv4, IPv6 USGv6, HTTP, HTTP/2, HTTPS, SSL/TLS, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, Bonjour, UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, SRTP, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SOCKS, SSH, SIP, LLDP, MQTT v3.1.1, Syslog

GENERAL	
Mounting	VESA 75, 100
Connectors	1 - RJ45 Ethernet 10/ 100 Base-T (PoE+) 1 Alarm Input 1 Alarm Output
Power Requirement	DC24V (0.8A) or PoE+ (30 Watts)
Power Consumption	14 Watts (DC24V) / 30 Watts (PoE+)
Operating Temperature	32°F - 122°F / -0°C - 50°C
Dimensions (W x H x D)	9.375" x 7.6" x 1.875" 238.125mm x 193mm x 47.625mm
Weight	3.5 lbs / 1.58 kg
Certifications	UL, CE, FCC, RoHS

RECOMMENDED POWER SUPPLY	
CE-PS19	58W Single Monitor Power Supply (24VDC)
CE-PS200	120W Single Monitor Power Supply (24VDC)
CE-S320-B	320W Multiple Monitor Power Supply (24VDC)
CE-S600-24-B	600W Multiple Monitor Power Supply (24VDC)
CE-PSG-5088V	8 Port 10/100/1000Mbps Gigabit PoE + Ethernet Switch



CERTIFICATIONS:

