

CE-PS102


Single Port Midspan PoE+ Injector



KEY FEATURES:

- 1 x RJ-45 Input for Data
- 1 x RJ-45 PoE+ Output for Data & Power
- IEEE 802.3af/at Compliant
- 30 Watts Max Power
- Output port has output current limited, short-circuit protection
- Convert standard 100-240V/AC power into low-voltage DC
- Smart Plug-and-Play
- Surface mountable, can be interlocked to other CE-PS102 Poe Injectors
- Includes AC power cord
- UL Listed

DIMENSIONS:

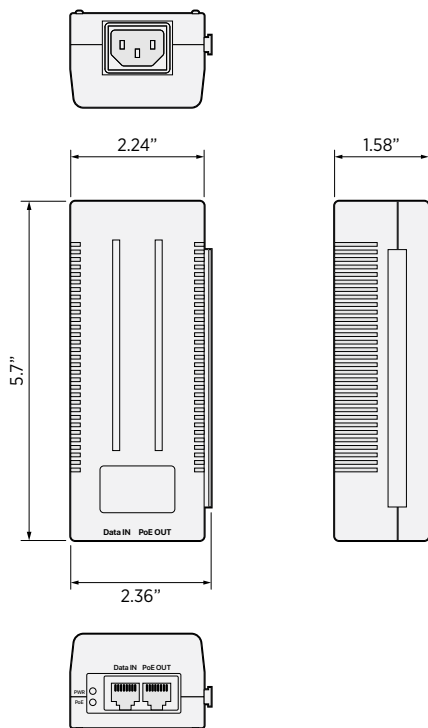

DATA & POWER

Power Input	100-240V AC, 50-60Hz
Power Output	15.4W for IEEE 802.3af (PoE) 30W for IEEE 802.3at (PoE+)
Power Output Voltage	48-52V DC at Full 30 W Output Supported
Power Consumption	35 Watts - w/ connected PD (Powered Device)
Data Rate	10/100/1000 Mbps

GENERAL

Standards	IEEE 802.3af IEEE 802.3at IEEE 802.3i 10BaseT IEEE 802.3i 100BaseTX IEEE 802.3x flow control
Certifications	UL Listed, FCC, CE
Operating Temperature	14°F - 104°F / -10°C - 40°C
Dimensions	5.7" x 2.24" x 1.58" / 145mm x 60mm x 40mm
Weight	0.7 lbs / 317.5 g