

CE-M43A-PIR

43" PVM w/ AXIS IP Camera - White




*Black Front / White Cabinet

KEY FEATURES:

- Built-In AXIS® M3065-V IP Camera w/ 3.1mm (f2.0) Fixed Lens
- Built-In PIR Sensor detects motion and switches from advertisement to camera or triggers banner overlay/flashing LED
- Alarm Input triggers: "Please Return to Cashier" message
- 1920 x 1080 Resolution / 16:9 Aspect Ratio
- Steel Cabinet with Low-Glare Tempered Glass Protective Front
- SD Card Player for advertisement/store logo (4GB SD Card Included)
- Banner overlay messages include; Recording In Progress, Welcome, etc.
- 1 RJ45 Ethernet Port
- 1 Alarm Input (+/-)
- 1 HDMI Input
- VESA 100x200, 200 (M6), 200 x 400 (M6)
- DC24V or AC110V (DC24V Power Supply Sold Separately)
- UL Listed, NDAA & TAA Compliant

DIMENSIONS:

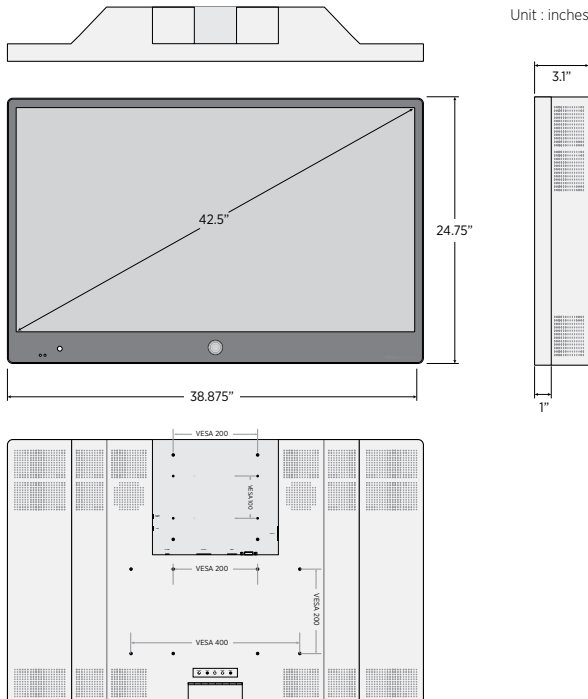

MONITOR	
Display	42.5" LED Backlight LCD
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	450 nit
Contrast Ratio	3000:1
Viewing Angle (H x V)	178° x 178°
Response Time	8ms

CAMERA	
Image Sensor	1/2.9" Progressive Scan RGB CMOS
Lens	3.1mm (f2.0) Lens
Field of View	102° (Horizontal) / 55° (Vertical)
Minimum Illumination	0.2 Lux (Color) / 0.04 Lux (B&W)
Shutter Speed	1/32500 - 1/5 sec.

VIDEO	
Video Compression	H.264 (MPEG-4 Part 10/AVC) Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG
Resolution	1920x1080 (1080p) to 320x240
Frame Rate	25/30 fps with power line frequency 50/60 Hz
Video Streaming	Multiple, individually configurable streams in H.264,H.265 and Motion JPEG Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth

NETWORK	
Security	Password protection, IP address filtering, HTTPS encryption, IEEE 802.1X network access control, Digest authentication, User access log, centralized certificate management, brute force delay protection, signed firmware
Supported Protocols	IPv4, IPv6 USGv6, HTTP, HTTP/2, HTTPS, SSL/TLS, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, Bonjour, UPnP*, SNMP v1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, SRTP, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SOCKS, SSH, SIP, LLDP, MQTT v3.1.1, Syslog

SYSTEM	
Event Actions	File upload: FTP, SFTP, HTTP, HTTPS, network share and email Notification: email, HTTP, HTTPS, TCP, and SNMP trap Pre- and post-alarm video buffering
Event Triggers	Analytics, edge storage events, virtual inputs through API

GENERAL	
Mounting	VESA 100x200 (M4), 200x200 (M6), 200x400 (M6)
Connectors	1 RJ45 Network Output Alarm Input (+/-) HDMI Input
Power Requirement	DC24V (3A) or 110-240VAC
Power Consumption	69 Watts
Operating Temperature	32°F - 122°F / -0°C - 50°C
Dimensions (W x H x D)	38.875" x 24.75" x 3.1" 987.43mm x 628.65mm x 78.74mm
Weight	45.35 lbs / 20.57 kgs
Certifications	UL, CE, FCC, RoHS, NDAA

RECOMMENDED POWER SUPPLY	
CE-PS200	DC24V (5A/120W) Single PVM Power Supply
CE-S320-B	DC24V (12.5A/320W) 3 PVM Power Supply
CE-600-24-B	DC24V (25A/600W) 3 PVM Power Supply

CERTIFICATIONS:

