

## CE-P13E-B


13" IP Connect PVM



### KEY FEATURES:

- 13" Portrait Mode Digital Signage PVM
- 1080 x 1920 Resolution / 16:9 Aspect Ratio
- 800 nit Brightness / 800:1 Contrast Ratio
- Screen content and scheduling is easily customized with included cloud-based Clinton Connect software
- Ads are updated via networked connection (Wifi or Ethernet)
- Built-In Clinton CE-PVM2MPF IP Camera w/ 2.8mm (f1.6) Fixed Lens
- Built-in WiFi
- Built-In Speakers
- Steel Bezel with Acrylic Front
- Programable LED Lightbar and flashing LEDs
- Video, Power & Network connections are secured behind cover plate
- 1 Button Triggered Alarm, 1 Alarm Input (terminal block)
- VESA 75 & 100
- DC24V (power supply sold separately)
- UL Listed, NDAA & TAA Compliant

### DIMENSIONS:

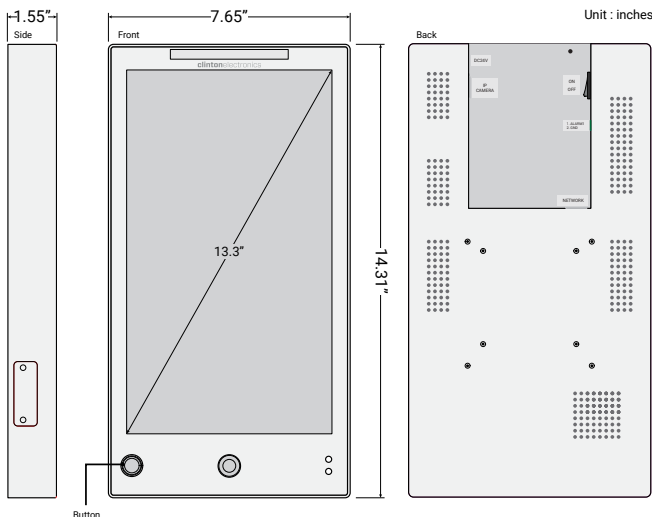

MONITOR	
Display	13.3" LED Backlight LCD (AHVA)
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	800 nit
Contrast Ratio	800:1
Viewing Angle	89° / 89°
Response Time	25ms

CAMERA (CE-PVM2MPF)	
Image Sensor	1/2.8" SONY Starvis 2.1 Megapixel CMOS Image Sensor
Lens	2.8mm (f1.6) Lens
Field of View	106.1° (Horizontal) / 55.2° (Vertical)
Minimum Illumination	0.2 Lux (Color) / 0.04 Lux (B&W)
Shutter Speed	1/4 - 1/10,000 sec.

GENERAL	
Video Outputs	1 RJ45 Ethernet Port - Camera Feed Only
Alarm Input	1 Terminal Block Alarm Input 1 Button (built-in to front bezel)
Network	1 RJ45 Ethernet Port Built-In Wifi (2.4GHz)
Mounting	VESA 75x75, 100x100
Material	Steel Bezel w/ Acrylic Front
Power Consumption	1A / 24 Watts
Power Requirement	24VDC
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	7.65" x 13.97" x 1.57" / 194.31mm x 363.47mm x 39.37mm
Weight	5.45 lbs / 2.245 kg

CLINTON CONNECT - Software	
Supported Web Browsers	Chrome, Safari, Edge
Advertising Components	Text Ticker, Images, Video, Camera Feed, Slideshow
Image Format	JPG, PNG, BMP
Video Format	MP4, MOV, AVI
Media Storage	100 GB Total— Monthly upload limits

RECOMMENDED POWER SUPPLY	
CE-PS91	3.75A / 90W Single Monitor Power Supply (24VDC)
CE-PS200	5A / 120W Single Monitor Power Supply (24VDC)
CE-S320-B	25A / 320W Multiple Monitor Power Supply (24VDC)
CE-S600-24-B	12.5A / 600W Multiple Monitor Power Supply (24VDC)

### CERTIFICATIONS:

