

CE-P21E-B

21" IP Connect PVM (Black)



KEY FEATURES:

- 21" Portrait Mode Digital Signage PVM
- 1080 x 1920 Resolution / 16:9 Aspect Ratio
- 350 nit Brightness / 1000:1 Contrast Ratio
- Screen content and scheduling is easily customized with included cloud-based Clinton Connect software
- Ads are updated via networked connection (Wifi or Ethernet)
- Built-In Clinton CE-PVM2MPF IP Camera w/ 2.8mm (f1.6) Fixed Lens
- Built-in WiFi
- Built-In Speakers
- Steel Bezel with Acrylic Front
- Programable LED Lightbar and flashing LEDs
- Video, Power & Network connections are secured behind cover plate
- 1 Button Triggered Alarm, 1 Alarm Input & Output (terminal block)
- VESA 75 & 100
- DC24V (power supply sold separately)
- UL Listed

MONITOR	
Display	21.5" LED Backlight LCD
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	350 nit
Contrast Ratio	1000:1
Viewing Angle	178° / 178°
Response Time	18ms



CAMERA	
Image Sensor	1/2.8" SONY Starvis 2.1 Megapixel CMOS Image Sensor
Lens	2.8mm (f1.6) Lens
Field of View	106.1° (Horizontal) / 55.2° (Vertical)
Minimum Illumination	0.2 Lux (Color) / 0.04 Lux (B&W)
Shutter Speed	1/4 - 1/10,000 sec.

GENERAL	
Video Outputs	1 RJ45 Ethernet Port - Camera Feed Only
Alarm Input	1 Terminal Block Alarm Input 1 Button (built-in to front bezel)
Alarm Output	1 Terminal Block Alarm Output
Network	1 RJ45 Ethernet Port Built-In Wifi (2.4GHz & 5GHz dual-band AC)
Mounting	VESA 75x75, 100x100
Material	Steel Bezel w/ Acrylic Front
Power Consumption	1.5A / 36 Watts
Power Requirement	24VDC
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	11.65" x 21.7" x 1.52" / 296mm x 551.36mm x 38.84mm
Weight	10.05 lbs / 4.55 kg


CLINTON CONNECT - Software	
Supported Web Browsers	Chrome, Safari, Edge
Advertising Components	Text Ticker, Images, Video, Camera Feed, Slideshow
Image Format	JPG, PNG, BMP
Video Format	MP4, MOV, AVI
Media Storage	100 GB Total— Monthly upload limits

RECOMMENDED POWER SUPPLY	
CE-PS91	3.75A / 90W Single Monitor Power Supply (24VDC)
CE-PS200	5A / 120W Single Monitor Power Supply (24VDC)
CE-S320-B	25A / 320W Multiple Monitor Power Supply (24VDC)
CE-S600-24-B	12.5A / 600W Multiple Monitor Power Supply (24VDC)

DIMENSIONS:

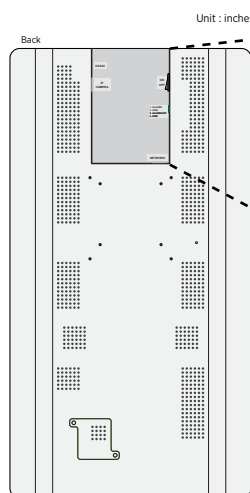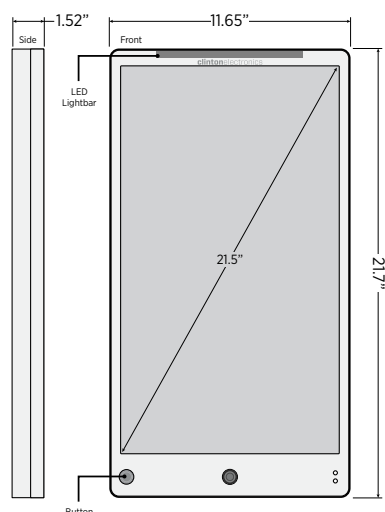

CONNECTIONS:



CERTIFICATIONS:

