


CE-P32E-B


32" IP Connect PVM (Black)

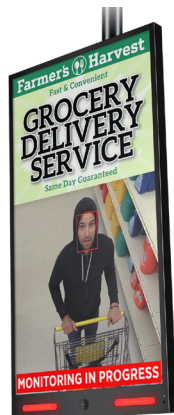

KEY FEATURES:

- 32" Portrait Mode Digital Signage PVM
- 1080 x 1920 Resolution / 16:9 Aspect Ratio
- 400 nit Brightness / 4,000:1 Contrast Ratio
- Screen content and scheduling is easily customized with included cloud-based Clinton Connect software
- Ads are updated via networked connection (Wifi or Ethernet)
- Built-In Clinton CE-PVM2MPF IP Camera w/ 3.6mm (f1.6) Fixed Lens
- Built-in WiFi
- Built-In Speakers
- Programable LED Lightbar and flashing LEDs
- Steel Bezel
- Power & Network connections are secured behind cover plate
- 1 RJ45 Network Connection, 1 RJ45 IP Camera Connection
- 2 Alarm Inputs (terminal block)
- VESA 75, 100, & 100x200 (M4)
- DC24V (power supply sold separately)
- UL Listed

DIMENSIONS:

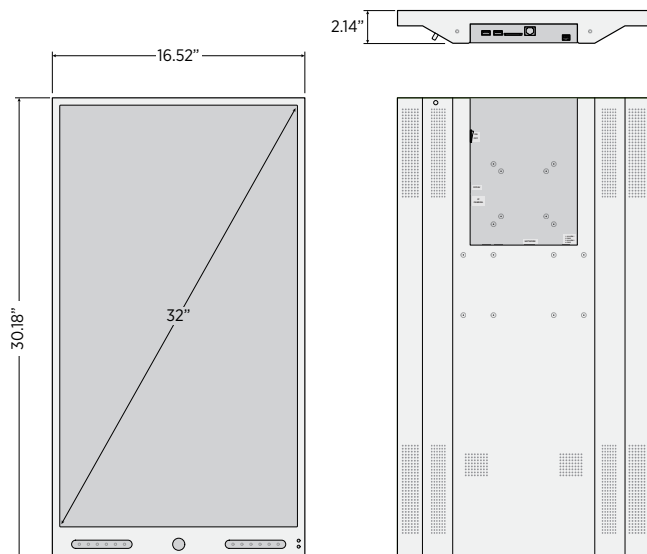

MONITOR

Display	32" WLED Backlight LCD (AMVA3)
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	400 nit
Contrast Ratio	4,000:1
Viewing Angle	178° / 178°
Response Time	8ms

CAMERA

Image Sensor	1/2.8" SONY Starvis 2.1 Megapixel CMOS Image Sensor
Resolution	Full HD 1080p @ 30fps
Lens	3.6mm (f1.6) Lens
Field of View	84° (Horizontal) / 47.8° (Vertical)
Minimum Illumination	0.002 Lux (Color) / 0 Lux (B&W)
Shutter Speed	1/4 - 1/10,000 sec.

GENERAL

Video Outputs	1 RJ45 Ethernet Port - Camera Feed Only
Alarm Input	1 Terminal Block Alarm Input (Alarm 1 / Alarm 2)
Network	1 RJ45 Ethernet Port Built-In Wifi (2.4GHz)
Mounting	VESA 75x75, 100x100 & 100x200
Material	Steel Bezel
Power Consumption	2.9A / 69 Watts (max)
Power Requirement	DC24V
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	16.52" x 30.18" x 2.14" / 419.65mm x 766.6mm x 54.4mm
Weight	21.6 lbs / 9.79 kg

CLINTON CONNECT - Software

Supported Web Browsers	Chrome, Safari, Edge
Advertising Components	Text Ticker, Images, Video, Camera Feed, Slideshow
Image Format	JPG, PNG, BMP
Video Format	MP4, MOV, AVI
Media Storage	100 GB Total— Monthly upload limits

RECOMMENDED POWER SUPPLY

CE-PS200	120W Single Monitor Power Supply (24VDC)
CE-S320-B	320W Multiple Monitor Power Supply (24VDC)
CE-600-24-B	600W Multiple Monitor Power Supply (24VDC)

CERTIFICATIONS:

