


CE-M10PEB+6


10" Dual-Screen Public View Monitor

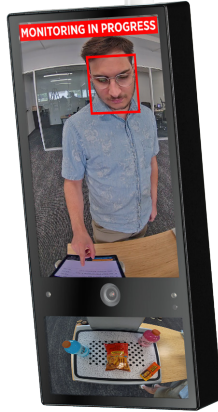

KEY FEATURES:

- Dual screen PVM, 10" display shows built-in camera image & the 6" display shows HDMI image from external camera or other source
- Built-In 2MP Clinton IP Camera w/ 2.8mm (f1.6) Fixed Lens, set to display Corridor Mode (portrait video)
- ONVIF Profile S Conformant Camera: CE-PVM2MPF
- Configurable Face Detection boxes (color, line thickness)
- Motion detection triggers optional flashing banner and/or LEDs
- Banner options: Recording in Progress, Monitoring in Progress, etc...
- Steel Cabinet with Black Acrylic Front
- Cable connections secured behind removable rear cover
- H.264, H.265 & Motion JPEG Compression
- 1 RJ45 Ethernet Port
- 1 HDMI Input (1080p max)
- VESA 75 & 100
- PoE+ or DC24V
- NDAA & TAA Compliant

DIMENSIONS:

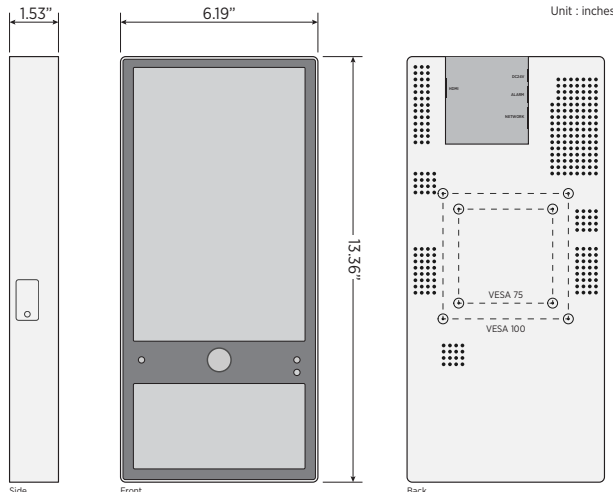

UPPER MONITOR	
Display	10.1" TFT LCD - Portrait Mode
Resolution	800 x 1280
Aspect Ratio	16:10
Display Colors	16.7M
Brightness	400 nit
Contrast Ratio	800:1
Viewing Angle (H x V)	170° x 170°
Response Time	29ms
LOWER MONITOR	
Display	5.99" TFT LCD - Landscape Mode
Resolution	1440 x 720
Aspect Ratio	2:1
Display Colors	16.7M
Brightness	400 nit
Contrast Ratio	1500:1
Viewing Angle (H x V)	160° x 160°
Response Time	30ms
CAMERA	
Image Sensor	1/2.8" SONY Starvis 2.1 Megapixel CMOS Image Sensor
Lens	2.8mm (f1.6) Lens
Field of View	106.1° (Horizontal) / 55.2° (Vertical)
Minimum Illumination	0.2 Lux (Color) / 0.04 Lux (B&W)
Shutter Speed	1/4 - 1/10,000 sec.
VIDEO	
Video Compression	H.264, H.265, and Motion JPEG
Resolution	1920x1080 (1080p) to 640x360
Frame Rate	1-30 fps
Bitrate Control	CBR, VBR, or VBR+ 1st Stream: 512-10,000 kbps 2nd & 3rd Stream: 512-8,000 kbps
Streaming	3 individually configurable streams
Storage	MicroSD Card (up to 256GB) *card not included
NETWORK	
Supported Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, SMTP, FTP, UPnP, HTTP
Stream Method	Unicast / Multicast
Standards	ONVIF Profile S
Web Viewer	Google Chrome, Edge, Firefox, Safari (MJPEG live view only)
GENERAL	
Mounting	VESA 75, 100
Connectors	1 - RJ45 Ethernet 10/ 100 Base-T (PoE+) 1 - HDMI Input for Lower Monitor 1 - Alarm Input / 1 - Alarm Output
Power Requirement	DC24V or PoE+
Power Consumption (max ±10%)	DC24V: 19.2 Watts / 0.8A PoE+ (IEEE 802.3at): 13 Watts / 0.27A
Operating Temperature	32°F - 122°F / -0°C - 50°C
Dimensions (W x H x D)	6.19" x 13.36" x 1.53" 157.4mm x 339.4mm x 39mm
Weight	4.5 lbs / 2.04 kgs
Certifications	UL, CE, FCC, RoHS
RECOMMENDED POWER SUPPLY	
CE-PS91	3.75A / 90W Single Monitor Power Supply (24VDC)
CE-PS200	5A / 120W Single Monitor Power Supply (24VDC)
CE-S320-B	25A / 320W Multiple Monitor Power Supply (24VDC)
CE-S600-24-B	12.5A / 600W Multiple Monitor Power Supply (24VDC)
CE-PS102	30W Single Port PoE+ Injector (48VDC)

