





CE-VT215-D1110 22" LCD w/ Built-in Decoder

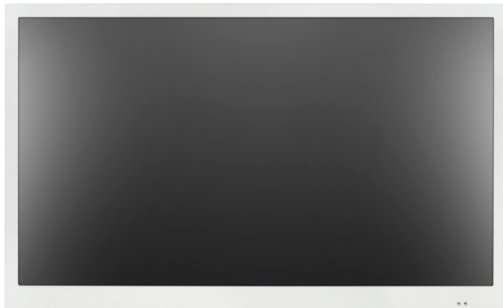

KEY FEATURES:

- Built-In AXIS® D1110 IP Camera Decoder
- Displays connected IP cameras in either Multiview or Sequence mode
- 1920 x 1080 Resolution
- 16:9 Aspect Ratio
- 250 nit Brightness
- 1000:1 Contrast Ratio
- 4 x RJ45 Ethernet Port
- Steel Bezel
- Optional "Recording In Progress" or "Monitoring In Progress" Overlay
- VESA 100 x 100
- DC24V, power supply sold separately
- Remote Included
- UL Listed

DIMENSIONS:

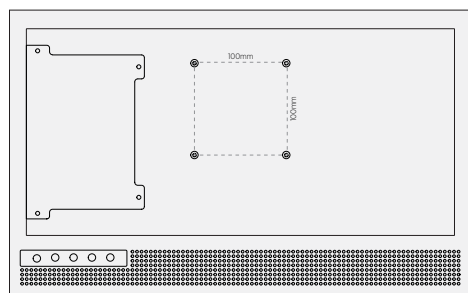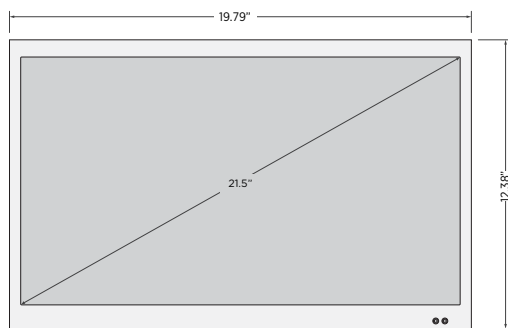

SPECIFICATIONS:

LCD Panel	21.5" LED Backlight / AHVA
Panel Resolution	1920 x 1080
Control	OSD (On Screen Display) Control
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	250 nit
Contrast Ratio	1000:1
Viewing Angle (H x V)	178° x 178°
Response Time	10ms
Refresh Rate	60 Hz
Support Resolution	640 x 350 - 1920 x 1080
Video Inputs	4 RJ45 (IP Camera Inputs)
Video Outputs	n/a
Audio Inputs / Outputs	n/a
Other Connections	1 x USB Firmware/Service Port
Power Output	n/a
Mounting	VESA 100 x 100 (M4)
Power Requirement	DC24V
Power Consumption ± 10%	25 W (1.04A) max
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	19.79" x 12.38" x 1.89" 502.6mm x 314.4mm x 48mm
Weight *stand removed	11 lbs / 4.98kg

Recommended DC24V Power Supply

CE-PS90	90W (3.75A) DC24V Single Monitor Power Supply, Class II
CE-PS91	90W (3.75A) DC24V Single Monitor Power Supply
CE-PS200	120W (5.0A) DC24V Single Monitor Power Supply
CE-S320-B	320W (12.5A) DC24V Multiple Monitor Power Supply
CE-600-24-B	600W (25A) DC24V Multiple Monitor Power Supply

CERTIFICATIONS:

