

CE-VT320-NVD 32" LCD w/ Built-in Decoder




Features:

- Built-In CE-NVD16 (Clinton Electronics 16ch Decoder)
- Displays connected IP cameras in either Multiview or Sequence mode
- Supports camera streams up to 4K @ 30FPS
- 1920 x 1080 Resolution / 16:9 Aspect Ratio
- 350 nit Brightness / 3000:1 Contrast Ratio
- 1 RJ45 Ethernet Port
- Steel Bezel
- Optional "Recording In Progress" or "Monitoring In Progress" Overlay
- Flashing LED (on/off selectable)
- VESA 100
- DC24V, power supply sold separately

NOTE: Base not included


MONITOR	
Display	32" LED Backlight LCD Panel
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M
Brightness	350 nit
Contrast Ratio	3000:1
Viewing Angle (H x V)	178° x 178°
Response Time	6.5ms
In / Out Impedance	75Ω / Auto Terminating Output
Control	OSD (On Screen Display) Control
DECODER INPUT	
Codec	H.264 / H.265
Camera Channels	Up to 16
Resolution	Up to 4K (3840x2160)
Frame Rate	1-30 fps
Max Decoding Performance	8MP @ 60FPS / 2M @ 360FPS
GENERAL	
Video Inputs	n/a
Network Connections	1 RJ45
Video Outputs	n/a
Audio Inputs / Outputs	n/a
Other Connections	1 x USB Firmware/Service Port (no video input)
Power Output	n/a
Power Consumption	48 Watts / 2 Amps
Power Requirement	24VDC (4-pin DIN connector)
Mounting	VESA 100
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	28.6" x 17" x 2.34" 72.64cm x 43.18cm x 5.94cm
Weight	19.6 lbs / 8.89 kgs

Dimensions:

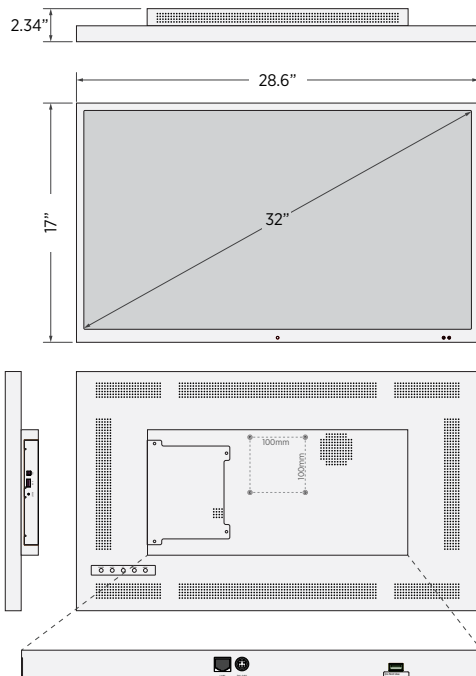


Display Options:

Default Layouts (4 Available)

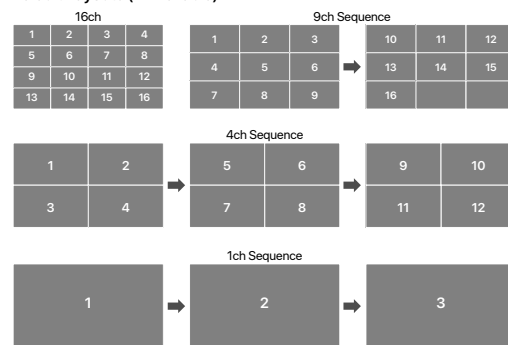

Custom Layout Examples (20+ Available)



Compliance:

