

CE-PS400POE


Four Port PoE++ Injector



KEY FEATURES:

- 4 x RJ-45 Input for Data
- 4 x RJ-45 PoE++ Output for Data & Power
- IEEE 802.3bt Compliant
- 90 Watts Max Power per channel
- 360 Watts Total Output
- Output port has output current limited, short-circuit protection
- Convert standard 100-240V/AC power into low-voltage DC
- Smart Plug-and-Play
- 19" Rack mountable (1U), Truss mount option
- Includes AC power cord

DIMENSIONS:

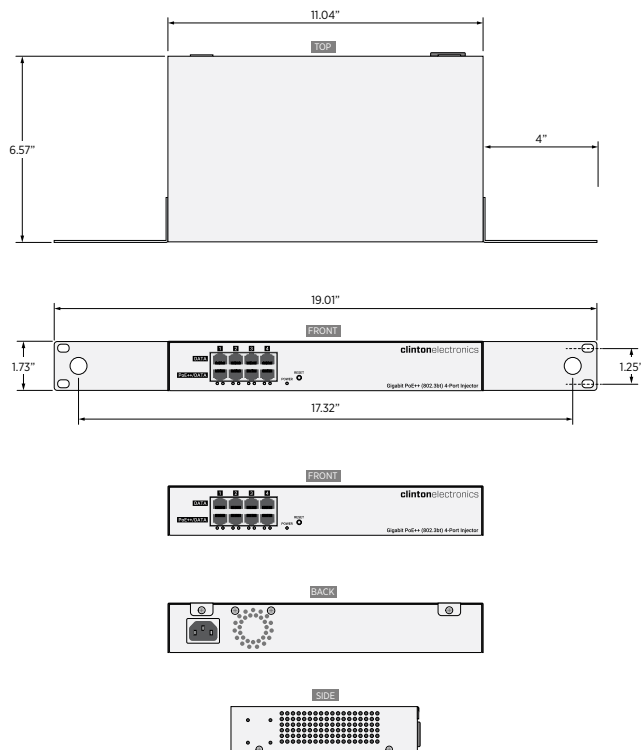

DATA & POWER

Power Input	100-240V AC, 50-60Hz
Power Output	90W for IEEE 802.3bt, Type 4 (PoE++) 30W for IEEE 802.3at (PoE+) 15.4W for IEEE 802.3af (PoE)
Power Output Voltage	56VDC at Full 90W Output Supported
Power Consumption	360 Watts - w/ four connected 90W PD (Powered Devices) 2 Watts - w/ nothing connected
Data Rate	10/100/1000 Mbps

GENERAL

Standards	IEEE 802.3bt Type 4 / 4PPoE / PoE++ (90 W) IEEE 802.3at Type 2 / PoE+ (30 W) IEEE 802.3af Type 1 / PoE (15.4 W) IEEE 802.3i 10BaseT IEEE 802.3i 100BaseTX IEEE 802.3x flow control
Certifications	TÜV SÜD
Operating Temperature	32°F - 104°F / 0°C - 40°C
Operating Humidity	10% to 90% RH (Non-Condensing)
Dimensions (unit only) HxWxD	1.73" x 11.04" x 6.57" / 44mm x 280.41mm x 166.87mm
Dimensions (rack-mount) HxWxD	1.73" x 19.01" x 6.57" / 44mm x 482.85mm x 166.87mm
Weight (unit only)	3.4 lbs / 1.542 kgs
Weight (rack-mount)	3.8 lbs / 1.723 kgs

CERTIFICATIONS:

