


CE-VT270-NVD 27" LCD w/ Built-in Decoder

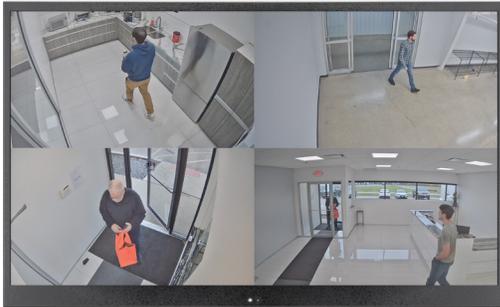


Features:

- Built-In CE-NVD16 (Clinton Electronics 16ch Decoder)
- Displays connected IP cameras in either Multiview or Sequence mode
- Supports camera streams up to 4K @ 30FPS
- 1920 x 1080 Resolution / 16:9 Aspect Ratio
- 300 nit Brightness / 3000:1 Contrast Ratio
- 1 RJ45 Ethernet Port
- Steel Bezel
- Web-based management interface
- Image Banners can be uploaded through web-based interface
- Configurable colored screen border highlight
- Selectable flashing LED indicator
- VESA 100
- PoE++ or DC24V, power supply sold separately

NOTE: Base not included


MONITOR	
Display	27" LED Backlight LCD Panel
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M
Brightness	300 nit
Contrast Ratio	3000:1
Viewing Angle (H x V)	178° x 178°
Response Time	8ms
Refresh Rate	60 Hz
Control	OSD (On Screen Display) Control
DECODER INPUT	
Codec	H.264 / H.265 / MJPEG
Camera Channels	Up to 16
Resolution	Up to 4K (3840x2160)
Frame Rate	1-30 fps
Max Decoding Performance	8MP @ 60FPS (3.75fps x 16) / 2M @ 360FPS (22.5fps x 16)
GENERAL	
Video Inputs	n/a
Network Connections	1 RJ45
Video Outputs	n/a
Audio Inputs / Outputs	n/a
Other Connections	1 x USB Firmware/Service Port (no video input)
Power Requirement	PoE++ (IEEE 802.3bt) or 24VDC
Power Consumption (±10%)	PoE++: 39 Watts / DC24V: 36 Watts (1.5 Amps)
Mounting	VESA 100 (M4)
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	24.375" x 14.875" x 2" 619.13mm x 377.83mm x 50.8mm
Weight	12.4 lbs / 5.62kg

Dimensions:

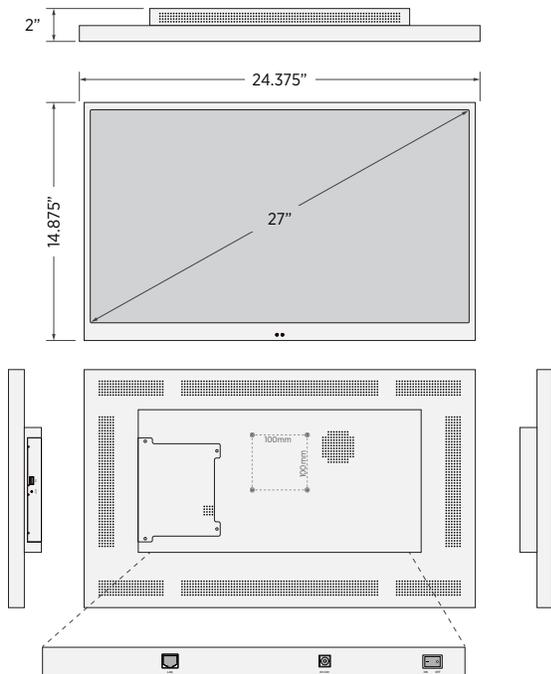


Display Options:

Default Layouts (4 Available)

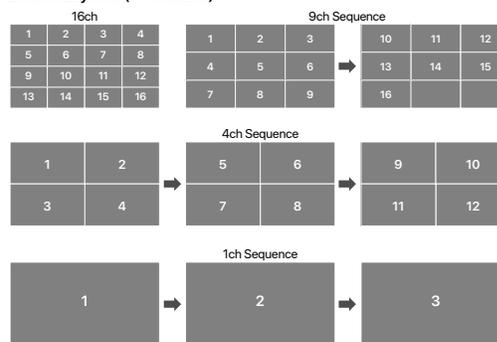

Custom Layout Examples (20+ Available)



Compliance:

