

## CE-VT320-T8705 32" LCD w/ IP Camera Multiplexer




### FEATURES:

- Built-In AXIS® T8705 IP Camera Decoder
- Displays connected IP cameras in either Multiview or Sequence mode
- 1920 x 1080 Resolution / 16:9 Aspect Ratio
- 350 nit Brightness / 3000:1 Contrast Ratio
- 1 HDMI Input
- 4 RJ45 Ethernet Port
- Steel Bezel
- Flashing LED (on/off selectable)
- VESA 100, 100 x 200 & 200
- DC24V
- Remote Included
- UL Listed

**NOTE: Base not included**

### DIMENSIONS:

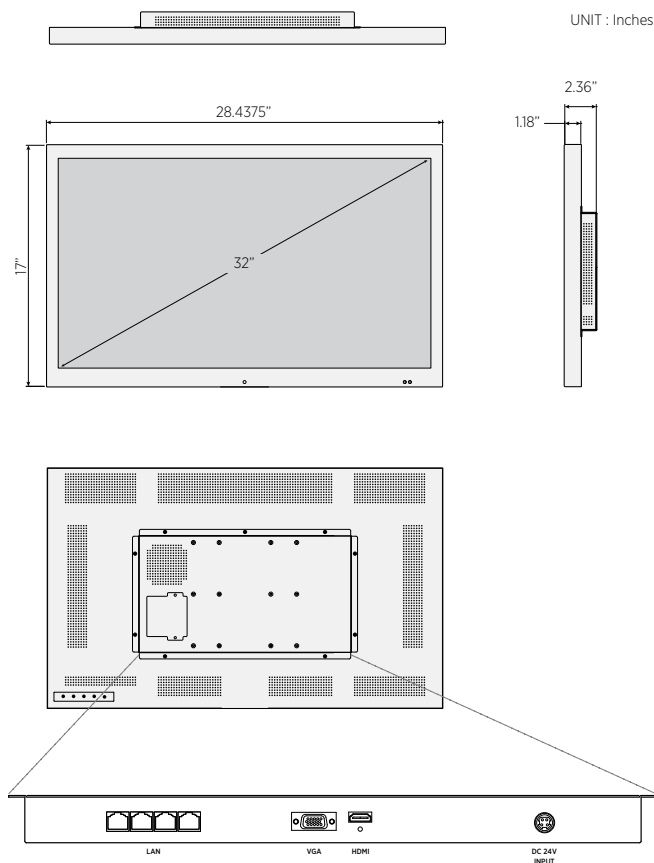

### SPECIFICATIONS:

|                        |                                                           |
|------------------------|-----------------------------------------------------------|
| Display                | 32" LED Backlight LCD Panel                               |
| Resolution             | 1920 x 1080                                               |
| Control                | OSD (On Screen Display) Control                           |
| Aspect Ratio           | 16:9                                                      |
| Display Colors         | 16.7M                                                     |
| Brightness             | 350 nit                                                   |
| Contrast Ratio         | 3000:1                                                    |
| Viewing Angle (H x V)  | 178° x 178°                                               |
| Response Time          | 6.5ms                                                     |
| In / Out Impedance     | 75Ω /Auto Terminating Output                              |
| Video Inputs           | 1 HDMI Input                                              |
| Network Connections    | 4 RJ45                                                    |
| Support Resolution     | 640 x 480 - 1920 x 1080                                   |
| Video Outputs          | n/a                                                       |
| Audio Inputs / Outputs | n/a                                                       |
| Other Connections      | 1 x VGA Firmware/Service Port (no video input)            |
| Power Output           | n/a                                                       |
| Power Consumption      | 38.72 Watts (DC24V)                                       |
| Power Requirement      | 24VDC                                                     |
| Mounting               | VESA 100 & 100 x 200                                      |
| Operating Temperature  | 32°F - 104°F / 0°C - 40°C                                 |
| Dimensions (W x H x D) | 28.4375" x 17" x 2.36"<br>722.3125mm x 431.8mm x 59.944mm |
| Weight                 | 19 lbs / 8.61 kgs                                         |

### Recommended DC24V Power Supply

|             |                                                  |
|-------------|--------------------------------------------------|
| CE-PS200    | 120W (5.0A) DC24V Single Monitor Power Supply    |
| CE-S320-B   | 320W (12.5A) DC24V Multiple Monitor Power Supply |
| CE-600-24-B | 600W (25A) DC24V Multiple Monitor Power Supply   |

### CERTIFICATIONS:

